


VOLUME 1 | 2017
ISSUE 1, MAY

ISSN 2545 - 4390

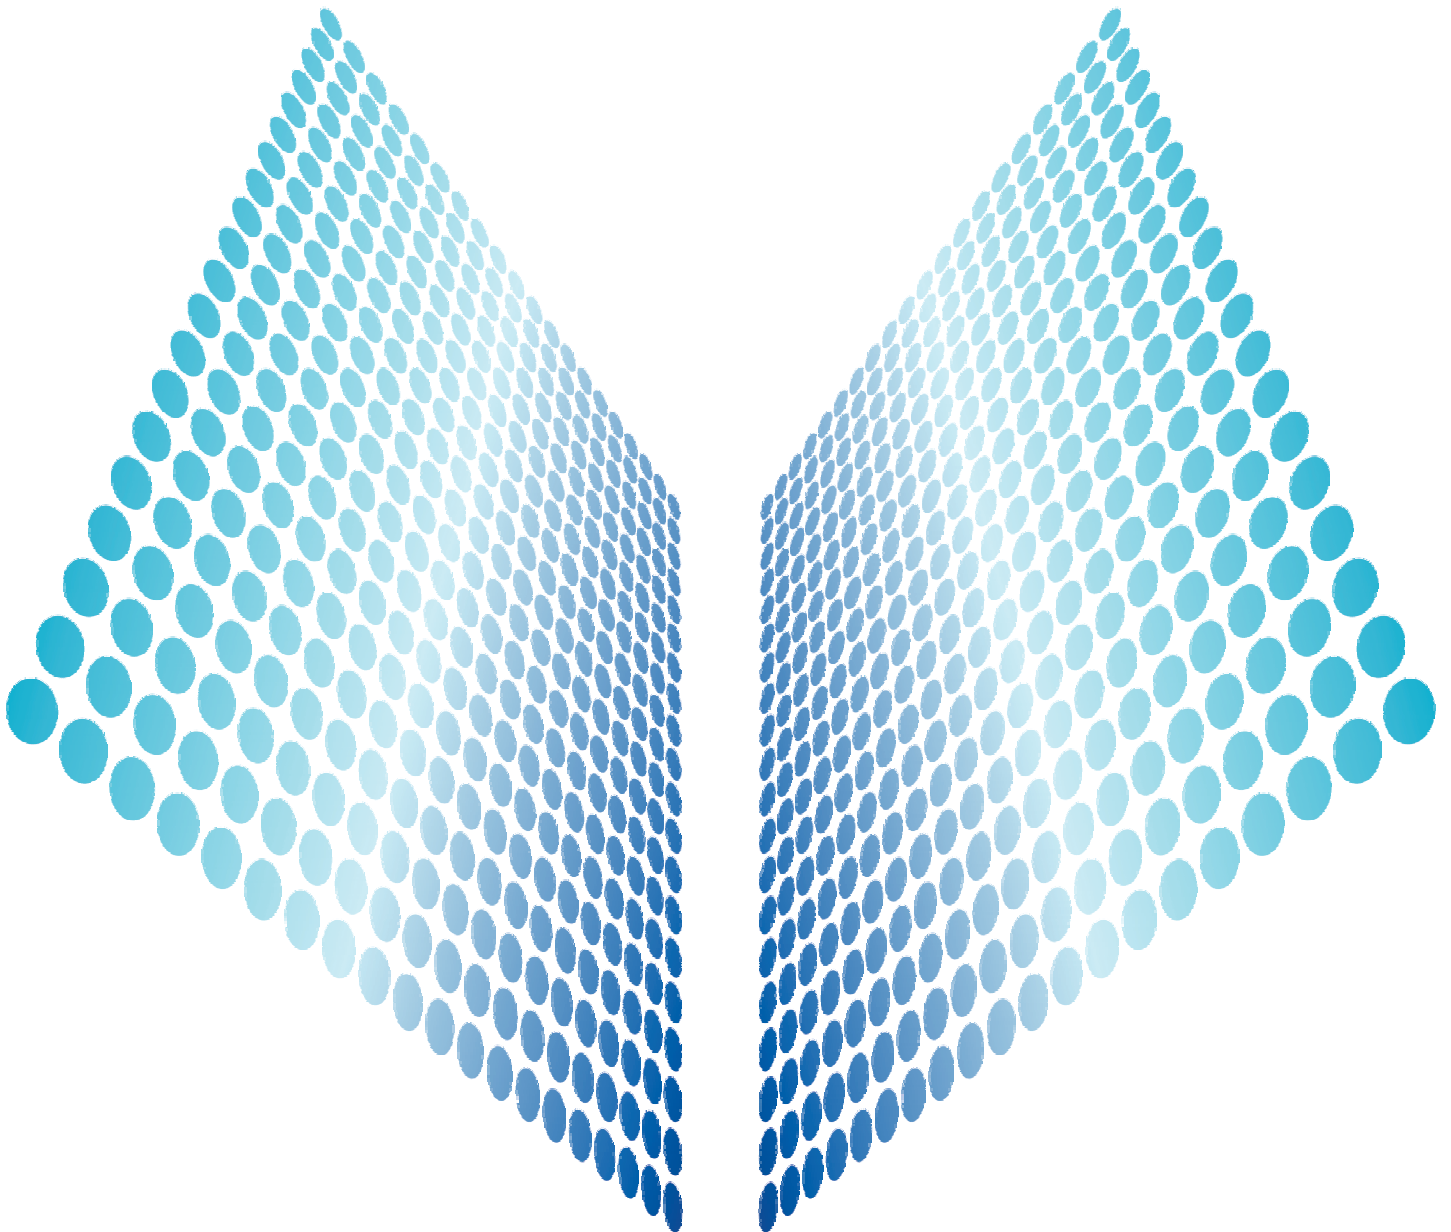

PUBLISHER: EURO STARTER

Street Address: Braka Miladinovi no. 406/6, Tetovo

Country: Macedonia

Phone: +389 70 616150

board@temel-ij.org

<http://temel-ij.org>

EDITORIAL BOARD

Roberto Pasic, Faculty of Technical Science – Bitola, **R. Macedonia** – editor in chief

Ivo Kuzmanov, Faculty of Technical Science – Bitola, **R. Macedonia** – editor in chief

Kazumi Nakamutsu, University of Hyogo, **Japan**

Alexandru-Mircea Nedelea, Stefan cel Mare University of Suceava, **Romania**

Elitza Iordanova, Faculty of Design, Media & Management, Buck New University, **UK**

Marius Sikveland, University of Stavanger, **Norway**

Ajda Foshier, Faculty of Entrepreneurship, **Slovenia**

Stevo Borojevic, University of Banja Luka, **BiH**

K.B. Akhilesh, Indian Institute of Science, **India**

Aleksandar Erceg, Strossmayer University in Osijek, **Croatia**

Marina Letonja, Faculty of Entrepreneurship, **Slovenia**

Fritz-Christoph Horstmann, Management Consulting, **Germany**

Stanislav Ivanov, Varna University of Management, **Bulgaria**

Marjana Mekac, Faculty of Entrepreneurship, **Slovenia**

Nemanja Kasikovic, Faculty of Technical Science, University of Novi Sad, **Serbia**

Ivan Mihajlovic, Technical Faculty in Bor, University of Belgrade, **Serbia**

Renata Stasiac, Czestochowa University of Technology, **Poland**

Mitja Jeraj, Faculty of Entrepreneurship, **Slovenia**

Zivan Zivkovic, Technical Faculty in Bor, University of Belgrade, **Serbia**

Indexing and Abstracting – TEMEL International Journal



Content:

PAPER TITLE	PAGE No.
5S – IMPROVING OPERATIONAL EFFICIENCY - Aleksandar Erceg (PhD), Predrag Dotlić (MSc), Matej Milohnoja (BSc);	6 - 12
Q-LEARNING FOR DEVELOPMENT OF ADAPTIVE SIGNAL CONTROL ON URBAN INTERSECTION - Daniela Koltovska Nechoska (PhD);	13 - 17
IMPLEMENTING FMEA METHODOLOGY INTO INDUSTRIAL CAPACITY FROM MACEDONIA - Ivo Kuzmanov (PhD), Roberto Pasic (PhD), Oliver Slivoski (PhD candidate);	18 - 21
TRADEMARK VALUATION – MANAGING INTANGIBLE ASSETS FOR STRATEGIC COMPANY BENEFITS - Gjorgji Rafajlovski (MSc);	22 - 32
ANALYSIS AND COMPARISON EXHAUST GAS EMISSIONS OF PELLET BOILER WHILE WORKING WITH THREE DIFFERENT TYPES OF PELLETS - Oliver Slivoski (PhD candidate), Igor Andreevski (PhD), Nusev Stojance (PhD), Dragan Temeljkovski (PhD), Vitomir Stojanovski (PhD);	33 - 40
IMPLEMENTING QFD METHODOLOGY FOR EVALUATING THE EDUCATION AND CREATING A SHORT TERM STRATEGY - Jovanka Kuzmanova (Elementary School Professor), Ivo Kuzmanov (PhD), Roberto Pasic (PhD);	41 - 44
ROLE AND FUNCTION OF INTERNATIONALIZED DOMAIN NAMES IN THE BUSINESS ENVIRONMENT - Ljubisa Stefanoski (PhD);	45 - 50
KNOWLEDGE MANAGEMENT - NEW MANAGEMENT PARADIGM AND TOTAL QUALITY MANAGEMENT, INTEGRATED APPROACH TO MANAGEMENT - Biljana Vangelovska (BSc), Ivo Kuzmanov (PhD), Silvana Angelevska (PhD);	51 - 54
DEVELOPMENT OF PORTABLE LOW COST PARTICULATE MATTER SENSOR BASED ON LASER SCATTERING TECHNOLOGY - Roberto Pasic (PhD), Aleksandar Markoski (PhD), Nikola Rendeovski (PhD), Ivo Kuzmanov (PhD);	55 - 58
BASIC STEPS AND TECHNIQUES USING IN OBTAINING THE STRUCTURE FROM MOTION - Svetlana Mijakovska (PhD), Filip Popovski (PhD);	59 - 62
MULTICRITERIA ANALYSIS OF ACHIEVED SCIENTIFIC RESULTS AT TECHNICAL FACULTY IN BOR, UNIVERSITY OF BELGRADE – Živan Živković (PhD), Đorđe Nikolić (PhD), Predrag Đorđević (PhD), Milica Arsić (PhD), Ivan Mihajlović (PhD).	63 - 73

BASIC STEPS AND TECHNIQUES USING IN OBTAINING THE STRUCTURE FROM MOTION

Svetlana Mijakovska, Filip Popovski

Abstract: *Obtaining structure from motion (recovery three dimensional structure from video footage of scenes) has been a interesting area of research in computer vision. This problem is known as Structure from Motion (SfM). SfM is trying to recover, from segments of images the 3D structure of a scene and the position and pose (orientation) of camera at the moment of capturing each images (as a part of video sequences).*

This article presents the basic steps and techniques used in SfM (feature matching, structure and camera calculation, auto calibration and increase robustness).

Key words: *structure from motion, 3D model, feature matching, point matching, correspondences, essential matrix, fundamental matrix, tensor.*

1. INTRODUCTION

Structure from motion is used for recovered 3D models from video sequences. The purpose of structure from motion is getting cloud of 3D points in the scene, which in the processs of feature matching and meshing, give the final 3D model.

So, given the position of a feature in one image (sequence) we need to find the corresponding position of the same feature in successive image. This is correspondence problem and is based on principles of multiple view geometry.

Features can include points, lines, and higher level primitives, for example planes. Generally most common approach is based on points (Fig.1). Points features are extracted easy from images, using corner detector. There are many corner detectors, but most used is Harris corner detector [1].

When one points of interest have been identified, then is needed some similarity to compare candidate points between the images. There are more correlation techniques for similarity measure by comparing the intensity differences between pixels.

Commonly used method is Normalised Cross Correlation (NCC) [2], because this method is invariant to global changes in illumination between the images (sequences).

Another method is KLT tracker [3], who select corner features based on the principle: a good feature can be well tracked, and the tracking should not be separated from feature extraction. This method measures the dissimilarity between feature in the first and current image and allow affine image changes.

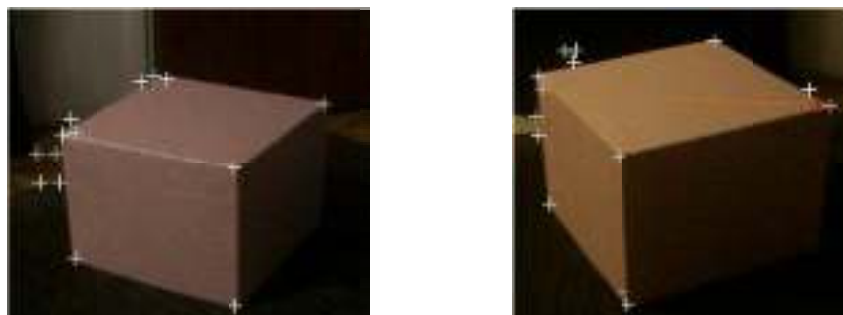


Fig. 1 Found corner points as a feature points

2. STRUCTURE AND CAMERA CALIBRATION

Structure from motion is based on principles of multiple view geometry.

The projective geometry that describes the relations between two views of a scene is epipolar geometry (Fig.2), and depends only on the intrinsic parameters of the cameras and their pose relative to each other.

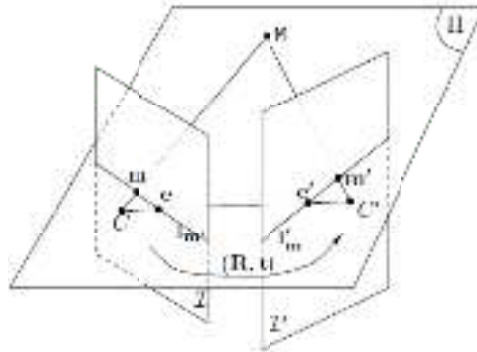


Fig. 2 Epipolar geometry

The matrix that encapsulated the epipolar geometry of two calibrated cameras is called *Essential matrix* [4]. Essential matrix can also be generalised to the case of uncalibrated cameras, and this matrix is *Fundamental matrix* [5]. This method is very useful for recover projective structure of a scene and camera motion from image correspondences, without any knowledge of the camera parameters.

The three view equivalent to the fundamental matrix is the trifocal tensor, who depends only of the relative pose of the cameras and their intrinsic parameters. Three views geometry allow a overlap of two views between successive image triplets in long sequences, and this simplifies method of stitching of a large numbers of views. (Fig.3).

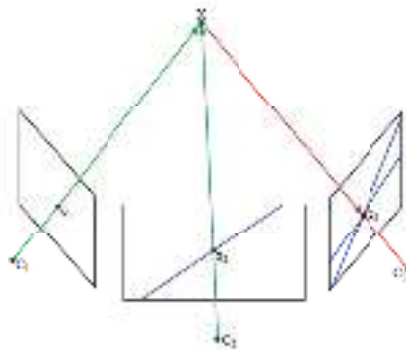


Fig. 3 Trifocal tensor

There is also quadrifocal tensor – geometry of four views. But, most cases of reconstruction from contain many more than four views and required techniques is N-view geometry [6]. Fundamental matrix are calculated separately for overlapping pairs (triplets) of all images in the sequences. Another, approach is to register all calculated tensors into the same coordinate frame.

3. AUTO CALIBRATION

For the projective reconstruction of a scene features the intrinsic parameters of the cameras must be recovered. By placing two constraints on some of intrinsic parameters, method of auto-calibration can

recover the intrinsic parameters and upgrade projective reconstruction to metric reconstruction. Most methods of auto-calibration are based on the concepts of absolute conic, which means that its relative position to moving camera is constant and images in any view depends only on the intrinsic parameters of the camera.

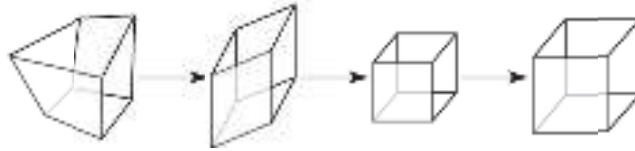


Fig. 4 Various geometric strata – projective, affine, metric, Euclidean

Fig.4 presents the relationship between the various geometric strata with their degrees of freedom:

- Projective – 15 degrees of freedom (dof),
- Affine – 12 degrees of freedom (dof),
- Metric 7 degrees of freedom (dof),
- Euclidean – 6 degrees of freedom (dof).

4. INCREASE ROBUSTNESS

Process of obtaining structure from motion are extremely sensitive to the presence of outliers and noise. Because of that, there are more techniques that are used for increase robustness, such a LmedS [7], RANSAC [8] and guided matching, where estimation of epipolar geometry is used to find more correspondences. These techniques are eliminate outliers (points that do not belong to the object) and there is possibility for adding interest points, which increases the quality of an object of the scene. Usage of these techniques are present in [9], [10], [11].

5. CONCLUSION

Purpose of this paper is to give an overview of the basic steps and techniques in obtaining the structure from motion. The automatic recovery of the three dimensional structure from video of a scene are useful for creating 3D models, which can be use in many areas, as animation, computer games, virtual reality. Process of obtaining structure from motion is composed of several steps: feature matching, structure and camera calculation, auto calibration and increase robustness. Each of these steps is a complex process, starting from finding points of interest, eliminating outliers points, matching points of interest and getting the structure of the motion. For increasing the quality of the structure, techniques of auto-calibration and increase robustness are used.

REFERENCES

Journal Papers:

- [1] Harris, C., Stephens, M., (1988). A combined corner and edge detector. *In Proceedings, 4th Alvey Vision Conference*, p. 147-151.
- [2] Duda, R., Hart, P., (1973). *Pattern Classification and Scene Analysis*. John Wiley & Sons.
- [3] Shi, J., Tomasi, C., (1994). Good features to track. *IEEE Conference on Computer Vision and Pattern Recognition*, p.920-925.
- [4] Longuet-Higgins, H.C., (1981). A computer algorithm for reconstruction a scene from two projections. *IEEE Transactions on Robotics and Automation*, p.133-135.
- [5] Faugeras, O., Luong, Q., Maybank, S., (1992). Camera self-calibration: Theory and experiments. *European Conference on Computer Vision*, p.321-334.

- [6] Beardsley, P., Torr, P., Zisserman, A., (1996). 3D Model Acquisition from Extended Image Sequences. *ECCV*, p.683-695.
- [7] Rousseeuw, P.J., Leroy, A. M., (1987). Robust regression and outlier detection. *John Wiley & Sons*.
- [8] Fischler, M., Bolles, R., (1981) Random sample consensus: a paradigm form model fitting with applications to image analysis and automated cartography. *Communications of the ACM*, p.381-395.
- [9] Mijakovska,S., Nedelkovski,I., Popovski, F., (2014). Generating 3D model from Video. *Advanced Computing: An International Journal (ACIJ)*, Vol.5, No.5/6.
- [10] Mijakovska,S., Nedelkovski,I., Popovski, F., (2014). Overview of the process of 3D modelling from video. *International Journal of Engineering Sciences & Emerging Technologies*, ISSN: 2231 – 6604 Volume 7, Issue 3, p. 680-686.
- [11] Mijakovska,S., Pasic,R., Kuzmanov, I.,(2016). Influence of Corner Detectors in the Process of 3D Modeling from Video. *International Journal of Scientific and Engineering Research*, ISSN 2229-5518 Volume 7, Issue 9, p. 228-232.